# Advanced CFD Engineering for DSI and ACI Systems



## **Overview**

Reaction Analytic Solutions has significant modeling experience and strong capability in design and optimization of Dry Sorbent Injection (DSI) and Activated Carbon Injection (ACI) technology for pollutants removal from flue gas. In addition to Conventional CFD flow modeling, we have incorporated a number of our in-house proprietary sorbent chemistry submodels.

## **Proprietary Chemistry Submodels**

- Hydrated lime +  $SO_3$
- Hydrated lime +  $HCl/SO_2$
- Trona/SBC +  $HCl/SO_2$
- Trona/SBC +  $SO_3$
- Activated carbon +  $Hg/HgCl_2$

## **Benefits**

The following table summarizes the advantages of chemistry-based Advanced CFD modeling versus flow-only (or non-chemistry) Conventional CFD modeling, in terms of CFD outlet and evaluation capabilities. Advanced CFD model provides "real-life" predictions, including not only the mixing and flow related output that a conventional CFD can provide, but also gas species concentration and reduction predictions. Advanced CFD model approach provides a much comprehensive and useful tool for evaluating a number of important design/operating parameters as well as sorbent properties.

	Conventional CFD Model (Flow-only)	Advanced CFD Model (Chemistry-Based)
CFD Output		
Particle Concentration Distribution	$\checkmark$	$\checkmark$
Particle Concentration RMS	$\checkmark$	$\checkmark$
Particle Trajectory	$\checkmark$	$\checkmark$
Pollutant Species Concentration	-	$\checkmark$
Pollutant Reduction	-	$\checkmark$
Evaluation Capability		
Impact of Injection Strategy	$\checkmark$	$\checkmark$
Impact of Residence Time	-	$\checkmark$
Impact of Flue Gas Temperature	-	$\checkmark$
Impact of Inlet Species Concentration	-	$\checkmark$
Impact of Sorbent Type	-	$\checkmark$
Impact of Sorbent Size	-	$\checkmark$
Impact of Sorbent Porosity	-	$\checkmark$
Impact of Sorbent Surface Area	-	$\checkmark$
Impact of Sorbent Flow Rate	-	$\checkmark$

## **Case Studies**

As an example, Fig. 1 shows a case using  $SO_3$  chemistry model to evaluate a DSI application at a 500 MWe coal-fired unit. Both sorbent dispersion and  $SO_3$  species concentration and reduction are predicted by the model. Fig. 2 shows the CFD predicted  $SO_2$  and HC concentration of DSI hydrated lime injection on a 200 MWe unit flue gas duct, using the chemistry model for hydrated lime reacting with  $SO_2$ /HCl. These models provide "real-life" results when optimizing injection systems.

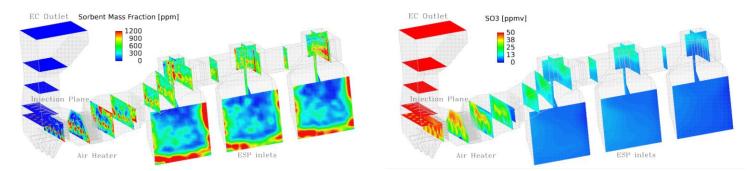


Fig. 1. CFD predictions of hydrate lime particle concentration (up) and  $SO_3$  species concentration (low) for a DSI application on a 500-MWe unit flue gas duct. CFD Domain starting from economizer outlet to ESP inlet.

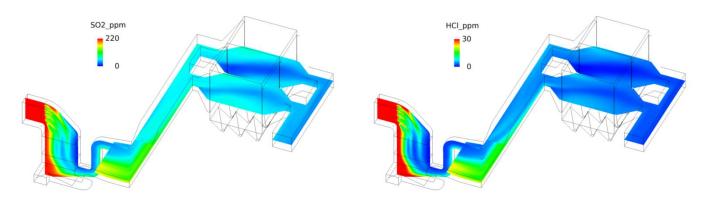


Fig. 2. CFD predictions of (left)  $SO_2$  and (right) HCl species concentration a DSI hydrated lime injection on a 200-MWe unit.

#### About Reaction Analytic Solutions Corp.

Reaction Analytic Solutions (RAS) is a well-recognized consulting service provider founded by a well-recognized CFD engineering specialist. RAS uses its unique CFD modelling service to support Air Pollution Control (APC) engineering projects for our clients. RAS's CFD engineer has modelled mixing and combustion of over 90 different units. We also have intensive experience in modeling sorbent injection technologies for flue gas pollutant reduction, including evaluating the sorbent injection system and optimization for mercury control, using our in-house proprietary chemistry kinetic submodels.



#### **Reaction Analytic Solutions Corp.**

1212 S. Naper Blvd., Suite 119-108 Naperville, IL 60540 Tel: (630) 708-8810 Email: <u>info@reaction-analytics.com</u> Website: <u>www.reaction-analytics.com</u>